WSPR Logger

How to read and use the web page: the live map, history, statistics, propagation analysis and the car's track

Otso Laakso (OH2GAX)

home locator KP20jg, southern Finland · https://wspr.oh2gax.org · https://github.com/oh2gax/wspr_logger

In short. A small WSPR transmitter with GPS sends a 200 mW signal on 20 m from the roof of a car every ten minutes. Volunteer receivers all over the world decode it and upload what they heard to a public database. The WSPR Logger reads that database every ten minutes and shows, in one web page:

- **where the car is and how well it is heard now** — the live map with the position, the stations that heard the last hour, the propagation estimate and the space weather (Section 3);
- **what happened at any earlier moment** — the History Player replays every stored ten-minute snapshot on the live map (Section 4), the History and Statistics pages show single days (Sections 5–6);
- **what the history says about the band** — the Propagation Analysis page: when the band opens, in which directions and how far the signal goes, how the ionosphere and the geomagnetic field change it, how the seasons compare, which days were unusual, and the chance of long-distance contacts in the coming hours (Section 7, the main part of this guide);
- **where the car has been** — the WPRS page turns the positions in the transmissions into a track (Section 8).

Section 1 explains WSPR as far as needed to read the page; Section 9 lists questions you can answer with it, and Section 10 what the data cannot tell.

About the figures. All figures are screenshots of the page with the station's own data: the live map is shown as it was on 13 October 2026 at 12:14 UTC, the other pages with the data up to 6 November 2026. In the figures the map background is a plain outline of the continents; on the real page it is a detailed street map. The numbers on your screen will differ from the ones quoted here, because the data grows every ten minutes.

Contents

1 WSPR in a nutshell **3**

1.1 The signal and the network . . . 3

1.2 How the logger collects its data . . . 3

2 The page at a glance **4**

3 The live map **5**

3.1 MUF / Reports graph . . . 7

3.2 Solar Conditions . . . 7

3.3 Reporter List, SNR / Dist Histogram and Reporter Plot . . . 8

3.4 Typical Day graph . . . 9

4 The History Player **10**

5 The History page **11**

6 The Statistics page **12**

7 The Propagation Analysis page **13**

7.1 The summary cards . . . 13

7.2 Right now . . . 13

7.3 Ionosonde view . . . 14

7.4 Band-open heatmap . . . 15
7.5 DX outlook — next 12 hours . . . 15
7.6 Typical day . . . 16
7.7 Reporters vs. MUF, K-index and solar flux . . . 16
7.8 Geomagnetic storm days . . . 17
7.9 DX windows by hour and month by month . . . 18
7.10 Grey line and long-distance windows . . . 18
7.11 Where you are heard and the distance distribution . . . 19
7.12 Band opening and closing . . . 20
7.13 Season against season and stations per month . . . 20
7.14 Signal strength by hour and by distance . . . 21
7.15 Unusual days . . . 21
7.16 Unusual DX openings . . . 22
7.17 Most loyal reporters . . . 22
7.18 Farthest reporters and excluded reports . . . 23

8 The WPRS page — where the car has been **24**

9 What you can find out **26**

10 Limitations **26**

11 Quick reference **27**

1 WSPR in a nutshell

1.1 The signal and the network

WSPR (Weak Signal Propagation Reporter, pronounced "whisper") is a radio protocol designed to find out where a weak signal can be heard. A transmission lasts 110.6 seconds, starts one second after an even minute and occupies only about 6 Hz in a 200 Hz wide part of the band (on 20 m: 14.0970–14.0972 MHz). It carries the callsign, a Maidenhead locator and the transmit power. A receiver decodes it down to a signal-to-noise ratio of about −30 dB, i.e. a signal a thousand times weaker than the noise in a normal 2.5 kHz receiver bandwidth.

Receivers report what they hear. Thousands of stations around the world listen on the WSPR frequencies around the clock, decode every transmission they can and upload the result to WSPRnet: who was heard, by whom, when, at what SNR and over which distance. The public mirror `wspr.live` makes all these reports available. A *reporter* (or *station*) on this page is one such receiving station.

The station. The transmitter is a ZachTek WSPR transmitter of about 200 mW (23 dBm) with a built-in GPS receiver, feeding a Diamond monoband 14 MHz whip on the roof of a VW Touran. It transmits once every ten minutes on 20 m. Because the transmitter computes its six-character locator from the GPS fix, every report also says where the car was, to within about 4.6 km.

1.2 How the logger collects its data

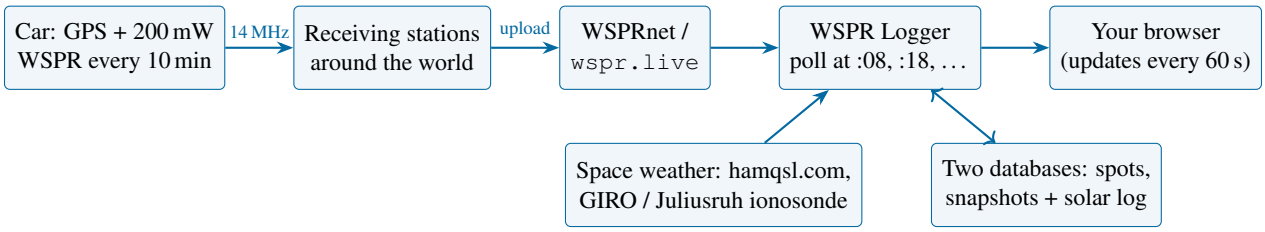


Figure 1. From the car to the page. The logger never talks to the receivers directly: it reads what they uploaded.

Every ten minutes. Six minutes after each transmission slot (at minutes :08, :18, :28 ...) the logger asks `wspr.live` for the reports of the last 45 minutes. Distant stations often upload a few minutes later than the nearby ones, so the last few slots are read again at every poll and their numbers are raised when late reports arrive (never lowered).

Two kinds of records. The logger keeps


- a **spot** for each transmission that was heard: time, locator (the car's position), the number of stations that heard it and the farthest one. These feed the live map, the History and Statistics pages and the WPRS track;
- a **snapshot** at every poll: the list of all stations that heard the beacon in the *preceding 60 minutes*, each with its locator, best SNR and distance, together with the space weather of that moment. Snapshots feed the History Player and the Analysis page.

Space weather. At every poll the logger also stores the solar flux (SFI), the K and A index, the X-ray class, the solar wind and the other indices from hamqsl.com, the maximum usable frequency MUF(3000) of the Juliusruh ionosonde in northern Germany (from the GIRO database) and its critical frequency foF2.

Three seasons. The live logger started in May 2026. The two earlier summers (from July 2024) were rebuilt afterwards from `wspr.live`, which keeps every report. They contain the spots and the snapshots, but **no space-weather values**, because those were never recorded. That is why the space-weather charts of the Analysis page only cover 2026.

Words used in this guide. **Transmission** or **spot**: one 2-minute WSPR transmission that somebody heard. **Station**, **reporter**: a receiving station (a callsign at a locator). **Snapshot**: what the logger stored at one poll — the stations heard in the preceding 60 minutes. **Stations heard** on the Analysis page always means the number of stations in a snapshot. **DX**: a station farther than 6 000 km. **SNR**: signal-to-noise ratio in dB, as reported by the receiver (2.5 kHz reference bandwidth). **UTC**: all times on the page are UTC (Finnish time is UTC + 2, in summer UTC + 3).

2 The page at a glance

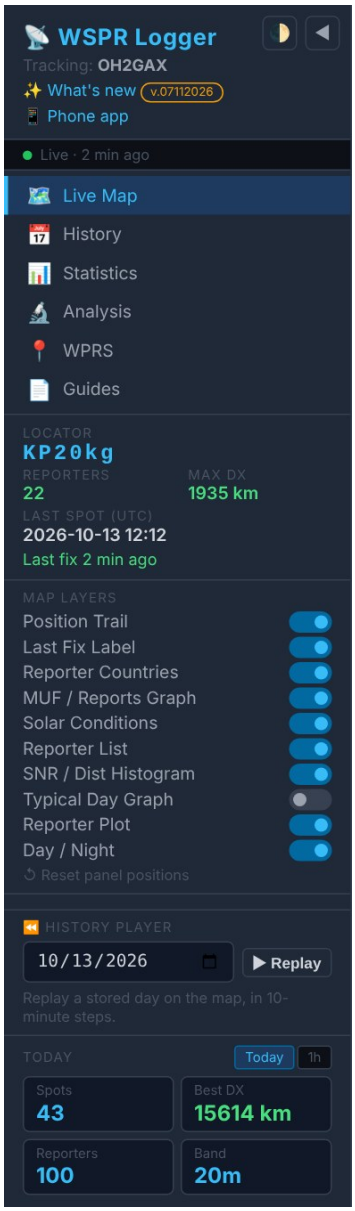

The menu (left pane). From the top:

- the **title**, the tracked callsign and What's new with the version label (a NEW marker until you open it);
- the **theme button** (it cycles Auto, Dark and Light; Auto follows your computer) and ◀, which hides the menu completely; the ▶ handle on the left edge of the page brings it back;
- the **status dot**: green when the newest spot is less than 20 minutes old, amber up to 2 hours, red beyond;
- the **pages**: Live Map, History, Statistics, Analysis, WPRS and Guides;
- the **Locator** block: the car's latest locator, the stations and farthest station of the latest transmission, and how old the latest fix is;
- the **Map Layers** switches of the live map (Section 3);
- the **History Player** card: pick a day and press ▶ Replay (Section 4); while it plays, the card shows the replayed moment with play / pause, the day steps and Live ×;
- the **Today / 1h** cards: transmissions heard, best DX, most stations in one transmission and the band, for the UTC day or the last hour.

The History Player card and Today always stay at the bottom; on a short window the part above them scrolls. Phone app under What's new opens the phone view (see the *Mobile app user guide*). The switches and their settings (MUF period and foF2, histogram tab, list order, Typical Day period, Today/1h, the place and size of panels you moved) are remembered in your browser; another browser or device keeps its own.

Figure 2. The menu on the left, with all Map Layers switched on.

What's new, User guides and About. What's new under the title and Guides in the menu open one window with three tabs: short notes on each version, the PDF documents (this guide and the technical papers about the station), and a description of the station.

Links to a view. The address in the browser follows what you look at: a History or Statistics day, the Analysis page, or a WPRS day and fix. Copy it and send it to someone, and the page opens on the same view (for example `#wprs=2026-10-14&days=5&fix=120`).

Phones and small screens. On a phone, use the phone view instead: `https://wspr.oh2gax.org/app` (Phone app under What's new), with one view at a time and every choice in a menu; it is described in the *Mobile app user guide*. This page works on a small screen too: hide the menu with ◀ to give the map the whole screen; on the Analysis page the cards are stacked in one column.

3 The live map



Figure 3. The live map on 13 October 2026 at 12:14 UTC with every layer switched on: the MUF graph across the top, Solar Conditions, the Reporter List and the SNR histogram on the left, the reporters as great-circle arcs on the map with the day/night terminator (dashed), and the Current Position, Propagation and Reporter Countries cards on the right.

The live map opens by default and refreshes itself every minute; the data behind it changes every ten minutes, after each poll. The car is the round marker: **green** when the newest spot is less than an hour old, **red** when older. Beside it, the 15 min ago label (switch Last Fix Label) says how old the position is: green up to 25 minutes (one transmission every ten minutes plus the upload delay), amber up to an hour, red beyond. The Position Trail switch draws today's positions as a dashed line.

Current Position. The UTC date and clock, the car's locator, the time of the latest heard transmission and its age, and for that transmission the number of stations that heard it, the farthest one (Max DX) and the band. The values turn red when the spot is more than an hour old.

Propagation. An estimate of the band from the stations that heard the latest transmission:

Stations	Shown as	Stations	Shown as
up to 5	Very low	41–60	Very good
6–10	Low	61–100	Extremely good
11–20	Normal	over 100	Exceptional
21–40	Good		

& DX is added when two or more of the stations of the last hour are beyond 6 000 km. **HIGH MUF** appears when the Juliusruh MUF is above 28 MHz. **No propagation** means no spot for more than an hour; at an hour when the band is usually open (judged from the last 30 days, so it follows the seasons) it says **No propagation or TX Fail** — check the transmitter. **DB Timeout!** (amber) means `wspr.live` is not answering: the silence is the database's, not the band's.

Compared with usual. Below the bar, the card compares the present with what is usual *for this time of day*: the stations heard in the last 60 minutes against the 30 days before today at the same UTC hour and, when there are enough polls, a similar MUF (in 2 MHz steps; 24 MHz and above count as one step, because on 20 m the number of stations stops growing at about 22 MHz — the extra MUF helps the higher bands). The verdict is *Much below usual* (below the 10 % level of those polls), *Below usual* (below 25 %), *Typical for this hour*, *Above usual* (above 75 %) or *Exceptional for this hour* (above 90 %); a difference of only a few stations stays *Typical*. The gauge shows the usual range: the dark band is the middle half, the light band 10–90 %, the line the median and the dot the present count. So the level above answers *how many* and this line *how good for the hour* — 8 stations at 03 UTC can be an excellent night, 25 at noon a weak day.



Figure 6. The cards on the right of the live map.

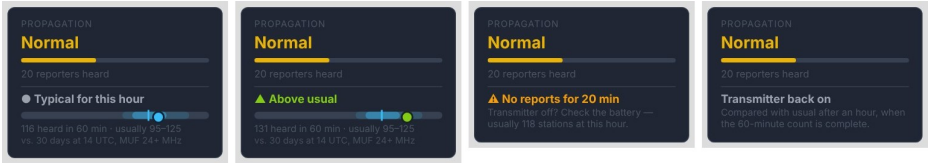


Figure 4. The Propagation card: typical for the hour; above usual; the transmitter warning; and the first hour after the transmitter came back.

Two other messages take the place of the verdict. **No reports for 20 min — transmitter off? Check the battery** (amber) appears when the last two polls heard nobody at an hour when the band is usually open: a real silence is then very unlikely. **Transmitter back on** is shown for an hour after such a break, because the 60-minute count is still filling up. In the History Player the comparison is not shown.

Unusual DX openings. When a region beyond 6 000 km is heard at an hour when it is seldom heard *at this time of year*, the card adds a purple line, for example **★ Unusual opening: Africa — 1 station, heard on 1.3 % of days at 21 UTC at this time of year**, and the arcs of those stations on the Reporter Plot turn purple. A green **▲ Unusually strong** line means a region that is usual at this hour but is heard by many more stations than ever usual. Section 7.16 explains the rules; the Analysis page lists every such event of your history.



Figure 5. An unusual opening on 3 October 2026 at 21:40 UTC: Réunion (Africa), heard at 21 UTC on 1.3 % of days at that time of year.

Reporter Countries. The countries of the stations of the last hour, with a bar and a count; a station with an unusual callsign is placed by its locator (for example *W. Europe*).

Why does Current Position show fewer stations than the list? The card counts the stations that heard the *latest transmission*, as far as they have uploaded by now; the Reporter List, the histogram, the plot and the countries cover *all stations of the last 60 minutes*. In Figure 3 the 12:12 transmission had 22 stations so far (more were still to come), while 193 stations heard the beacon in the last hour.


3.1 MUF / Reports graph



Figure 7. The MUF graph: Juliusruh MUF(3000) as the blue line, the stations of each transmission as green bars, for the last 2 days.

The blue line is the **MUF(3000)** measured by the ionosonde at Juliusruh: the highest frequency that the ionosphere above Juliusruh would return to the ground over a 3 000 km path. Your 20 m signal (14 MHz) needs the MUF of its own path to be above 14 MHz. The green bars are the stations that heard each transmission. Read the two together: in the morning the bars rise when the MUF climbs through about 14–16 MHz, they stay high while the MUF is high, and they fall away in the evening when the MUF drops below about 12 MHz. Use 1d / 2d / 3d / 1wk to change the span. The foF2 button adds a third line (amber) on the same MHz scale: the **foF2** of Juliusruh, the highest frequency the F2 layer returns straight up (Section 7.3); the MUF over 3 000 km is about three times foF2. foF2 is stored from November 2026, when the Juliusruh monitor page became its source, so the line starts there. Juliusruh is about 1 000 km south-west of the car, roughly under the path to Central Europe, so it describes the busiest paths quite well and the paths to other directions only roughly.

3.2 Solar Conditions



Field	Meaning, and when it is coloured
SFI	solar flux at 10.7 cm: the sun's activity (60–300)
K	geomagnetic disturbance, 0–9 (3-hour): green 0–1, orange 4–5, red 6+
A	daily geomagnetic index: yellow-green 8–15 … purple 100+
X-ray	solar flare class: C yellow, M orange, X red
Bz	north–south magnetic field of the solar wind (nT); south (negative) couples to the Earth's field: green to purple
J-MUF	Juliusruh MUF(3000) in MHz: grey below 8, green from 12, yellow 22+, red 30+
foF2	Juliusruh critical frequency (MHz), see Section 7.3
SW	solar wind speed (km/s): coloured from 450
AU	aurora activity 0–9: from 3
PF	proton flux (pfu): from 50 (S1 radiation storm)

Figure 8. Solar Conditions. A value is shown in the default colour when it is quiet; the colours rise with the disturbance (NOAA scales).

A MUF reading older than 3 hours is shown as —, because an old value must not look like the present one.

3.3 Reporter List, SNR / Dist Histogram and Reporter Plot



Reporter List. Every station of the last 60 minutes: band, callsign, locator, best SNR and distance. Click SNR or Dist to sort by it, largest first (▼); click it again for the smallest first (▲) — the weakest stations, or the nearest ones.

Histogram. How these stations spread over SNR (3 dB steps from −33 to +9 dB) or, with Dist, over distance. A peak far to the left means most stations hear you just above the decoding limit; a peak to the right, a strong signal.

Figure 9. Reporter List and SNR histogram of 13 October 2026 12:14: most stations hear the beacon at −27 to −15 dB.

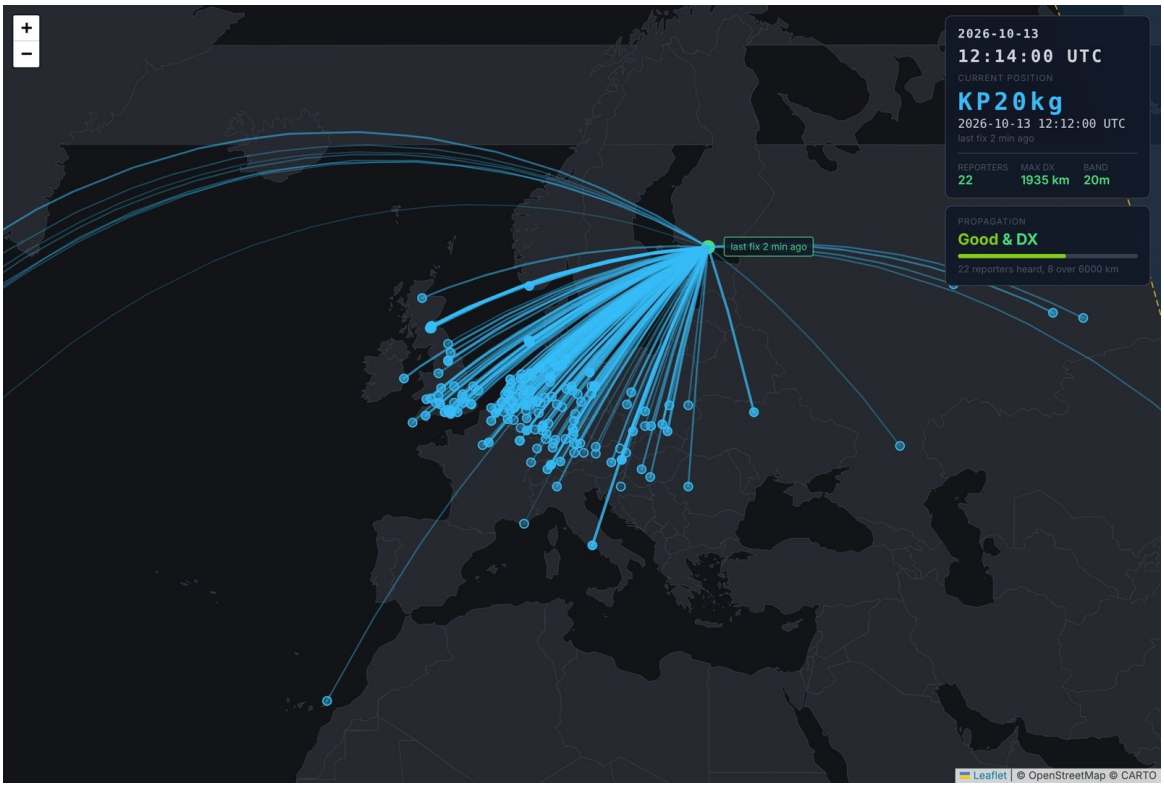


Figure 10. Reporter Plot over Europe: one circle per station, a great-circle line from the car to each; the stronger the signal, the thicker and brighter the line. Click a circle for callsign, locator, SNR and distance.

Reporter Plot draws each station of the last hour at its locator and a great-circle line from the car to it. The line weight and brightness follow the SNR, so the strongest paths stand out. Great-circle lines look curved on this map; they are the shortest paths on the globe (the line to Australia in Figure 3 goes over Asia, as the signal does).

Day / Night shades the night side of the Earth and draws the terminator (the grey line, dashed amber). Long-distance paths on 20 m often open when one end is near the terminator (Section 7.10).

Moving panels. The Reporter List, the histogram, Solar Conditions, the Typical Day graph and Reporter Countries can be dragged by their titles anywhere on the map; the place is remembered. The Typical Day graph, the Reporter List and Reporter Countries can also be resized from their lower right corner (Reporter Countries in height only). A list keeps the size you give it however many stations come in: the rest scrolls inside it, and the panels below it move up or down with

it. Unless resized, the Reporter List scrolls beyond about 13 stations and Reporter Countries beyond about 12 countries. Double-click a title, or Reset panel positions in the menu, to put a panel back in its place and size.

3.4 Typical Day graph

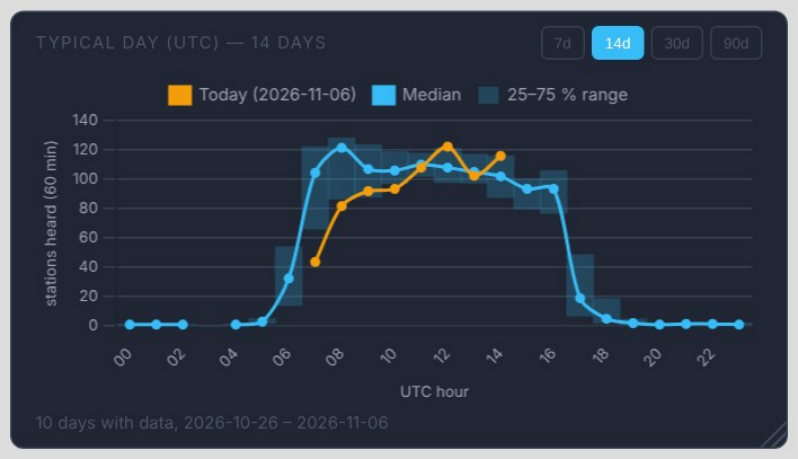


Figure 11. The Typical Day graph on 6 November 2026 at 14:20 UTC, over 14 days: today (orange) a little below the usual in the morning and above it around noon.

The Typical Day Graph switch puts the *Typical day (UTC)* card of the Analysis page (Section 7.6) on the live map: for each UTC hour the median number of stations heard in 60 minutes over the period (blue line) and the range of the middle half of the days (shaded), with today in orange. So you see at a glance whether the band is doing better or worse than usual at this hour. 7d / 14d / 30d / 90d choose the period; 14 and 90 days are kept ready by the server, the others take a few seconds the first time. The graph is updated with the map; the panel opens at the bottom left, and can be moved and resized.

4 The History Player



Figure 12. The History Player on 13 October 2026 at 05:28 UTC: the terminator crosses Europe, only two stations (Italy, Russia) and a Greek station hear the car before the band opens. The bar at the bottom controls the replay.





Figure 13. The player bar: play / pause, the time slider, the time and frame number, previous day, date, next day, speed and Live ×.

Pick a day in the History Player card at the bottom of the menu and press ▶ Replay to replay it on the live map (a day without stored data opens the nearest earlier one), one frame for every ten-minute snapshot (including the polls when nobody heard the car, so the night is not skipped). The layers you have switched on show the replayed moment: the Reporter List, histogram and plot, Reporter Countries, Solar Conditions (with the MUF and foF2 of that moment), Day / Night (the terminator of that moment) and the Propagation card (from the spot logged at that time). The Current Position box follows the replay too: its date and time show the replayed moment in amber under REPLAY, and below them the car's position at that moment, its stations and farthest station, and how old that fix was then; the car marker moves with it. A day without any logged position says so instead of showing the live position. Play at 1–16 frames per second, drag the slider, or step to the previous or next day that has data. Live ×, in the bar or in the card, returns to the present. The ▶ buttons on the Analysis page open the History Player at a chosen moment.

Try this. Replay a summer day at 4 frames per second with Reporter Plot and Day / Night on: watch the band open in the morning as the terminator passes, the arcs spread over Europe at midday, and the long arcs to North America in the early morning or to Africa and Australia in the afternoon.

5 The History page

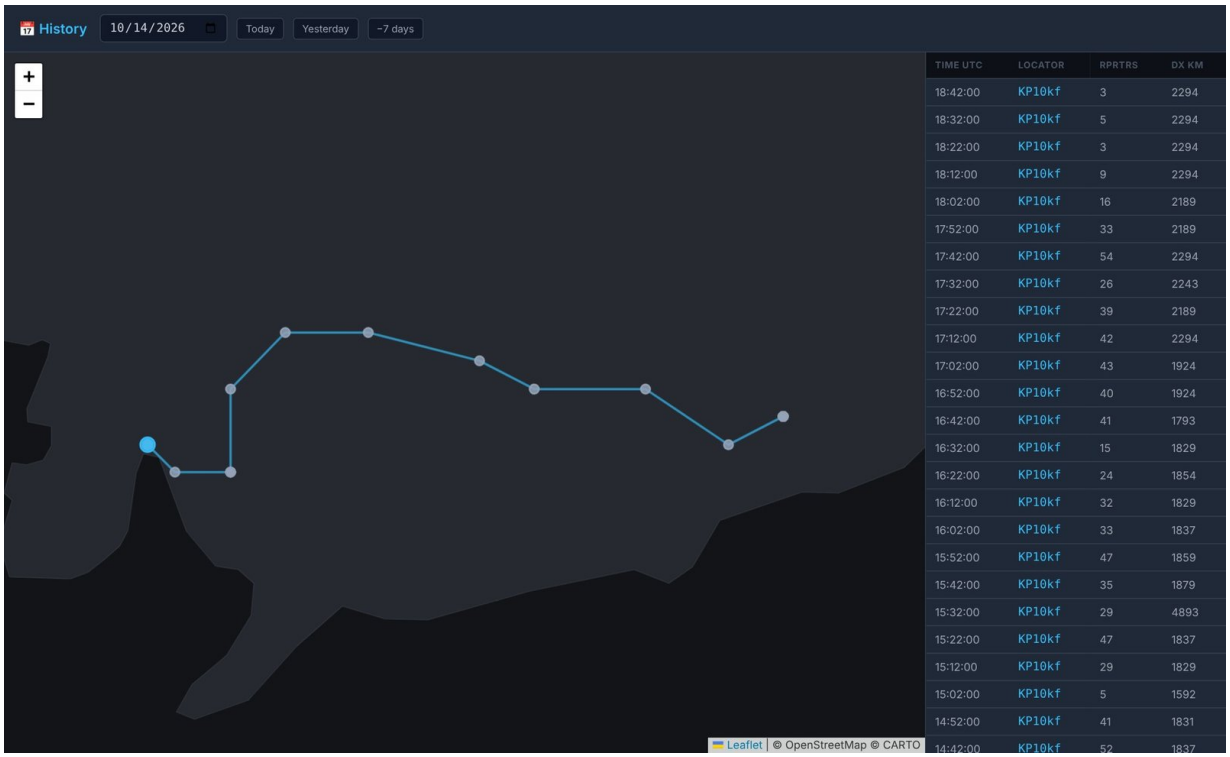

TIME UTC	LOCATOR	RPRTRS	DX KM
18:42:00	KP10kf	3	2294
18:32:00	KP10kf	5	2294
18:22:00	KP10kf	3	2294
18:12:00	KP10kf	9	2294
18:02:00	KP10kf	16	2189
17:52:00	KP10kf	33	2189
17:42:00	KP10kf	54	2294
17:32:00	KP10kf	26	2243
17:22:00	KP10kf	39	2189
17:12:00	KP10kf	42	2294
17:02:00	KP10kf	43	1924
16:52:00	KP10kf	40	1924
16:42:00	KP10kf	41	1793
16:32:00	KP10kf	15	1829
16:22:00	KP10kf	24	1854
16:12:00	KP10kf	32	1829
16:02:00	KP10kf	33	1837
15:52:00	KP10kf	47	1859
15:42:00	KP10kf	35	1879
15:32:00	KP10kf	29	4893
15:22:00	KP10kf	47	1837
15:12:00	KP10kf	29	1829
15:02:00	KP10kf	5	1592
14:52:00	KP10kf	41	1831
14:42:00	KP10kf	52	1837

Figure 14. The History page for 14 October 2026, the first day of a trip: the positions of the day on the map (green = first, blue = last) and every heard transmission in the table.

Pick a date (or Today, Yesterday, −7 days). The map shows the car's positions of the day as a track; the table lists every heard transmission with its time, locator, the number of stations and the farthest one. Click a marker for its details.

6 The Statistics page



Figure 15. Statistics for 13 October 2026: the day at a glance, *Through the day* and *Best DX per day* (the selected day highlighted in orange).

The day at a glance. Transmissions heard, the most stations in one transmission, the average, the longest DX (with its share of the all-time record, or a trophy on a record day), and the first and last heard transmission. ◄ and ► step through the days.

Through the day. Bars: the stations that heard each transmission; line: the farthest of them. A wall of bars from morning to evening is an open band; short spikes in the line are single long-distance reports.

Best DX per day. One bar per day with the farthest station of the day; the line is the most stations in one transmission. Click a bar to open that day. 30 d, 90 d or All.

All-time records and Logged dates. The best DX and the most stations ever, with the date each was set, the totals, and every date with data (click to open it).

7 The Propagation Analysis page

The Analysis page turns the stored snapshots into answers about the band. Everything on it is computed from the logger's own databases; nothing is asked from `wspr.live`. The page opens at the last 14 days, which the server prepares in advance after every poll, so it appears at once. The other periods are computed when chosen and then kept for 10 minutes: the first opening of one can take some seconds (a message says so, and on a period change the old cards stay dimmed with *Loading …* beside the buttons). The cards from *Where you are heard* onwards load on their own after the rest.

The period. The buttons at the top — 7 d, 14 d, 30 d, 90 d, 6 m, 1 yr, All — choose the history that the cards use. When the last 14 days hold no reports (the transmitter is off, usually from November to March), the page opens at the first longer period that has some and says so beside the dates; a period chosen by hand is shown even when it is empty. Exceptions: the DX outlook always uses the whole history, *Season against season* and *Stations per month* cover all seasons, and the Ionosonde view has its own buttons. The figures of this section use All: 4 July 2024 to 6 November 2026.

Three ideas that the whole page uses. **1. "Stations heard" is per snapshot.** It is the number of different stations that heard the beacon in the 60 minutes before a poll — so it is smoother and larger than the stations of one transmission.
2. The index: 100 = as usual at this hour. The number of stations follows the time of day much more than anything else: about 3 in the small hours, about 75 at midday. Space weather follows the time of day too (the MUF is high in the daytime). Comparing raw averages would therefore mostly show the daily rhythm. Many cards use an **index** instead: the stations heard divided by what is typical for the same UTC hour (over the chosen period), times 100. **100** = as many stations as usual at that hour, **150** = half again as many, **50** = half. In the bar charts the bars at or above 100 are blue, the ones below orange, and a dashed line marks 100.
3. DX share. The green lines of many charts give the share of snapshots in which at least one station was beyond 6 000 km — how often a long-distance path was open.

What the charts can and cannot say. They describe this one station: one car, one antenna, 200 mW, mostly from southern Finland. They show associations, not causes, and they cannot always tell a closed band from a switched-off transmitter. Since November 2026 the page leaves out the time the transmitter was evidently off: days with no reception at all, polls that heard nobody at an hour when the band is usually open (in the daytime, or all night in summer), and the first hour after such a break, while the 60-minute count builds up. Polls that heard nobody at usually quiet hours (autumn nights) count as real silence. Small samples are noisy: a bar or a table row based on a few dozen snapshots can be far off. Most cards say how many snapshots stand behind a value — hover a bar to see it.

7.1 The summary cards



Figure 16. The summary cards for the whole history.

Snapshots how many polls the period holds, and over how many days (54 868 over 495 days).
Avg reporters stations heard per snapshot, day and night together (56.3).
Reporter > 6000 km share of snapshots with a DX station (16.3 %: a long-distance path is open about one hour in six).
Farthest reporter the longest distance in the period and when (15 619 km, Tasmania).
Reporters ~ MUF two correlations between the stations heard and the Juliusruh MUF, from −1 to 1. *Raw* compares the plain numbers (0.70 — seemingly strong); *vs. typical hour* first removes the daily rhythm (0.32). The second is the honest one: most of the raw correlation comes from both following the sun. A positive value still means more stations when the MUF is higher than usual for the hour.

7.2 Right now



Figure 17. Right now: 116 stations at 14 UTC with a MUF of 26.9 MHz — typical when compared with similar MUF at this hour.

What it shows the stations heard in the last 60 minutes next to what the history says for the same UTC hour: the median and the usual range (the middle half of the snapshots, 25–75 %), and the same for snapshots with a similar MUF (the same 2 MHz step) when there are at least 8 of them.

How to read it *Better than usual* = above the usual range, *Below usual* = under it, *Typical* = inside. The verdict uses the MUF comparison when it exists (it is the fairer one: a low count on a low-MUF day is not a surprise), otherwise the hour. In the figure the 116 stations are well above the hour's 78 but inside the 93–119 that is usual at a MUF of 26–28 MHz.

Watch out no verdict is given while `wspr.live` is unreachable, and a MUF reading older than 3 hours is not used.

7.3 Ionosonde view

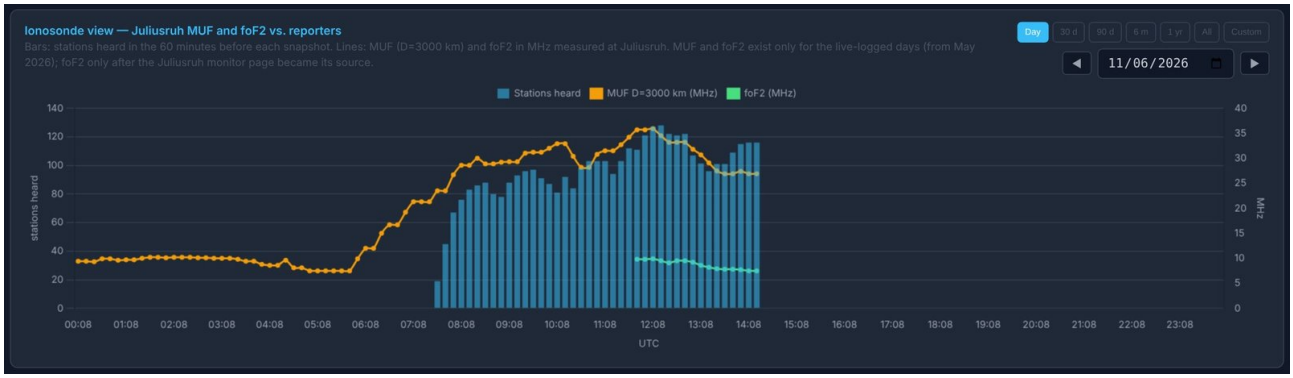


Figure 18. Ionosonde view, Day: 6 November 2026. Bars: stations heard per snapshot; orange: MUF(3000); green: foF2 (from 11:50 that day).

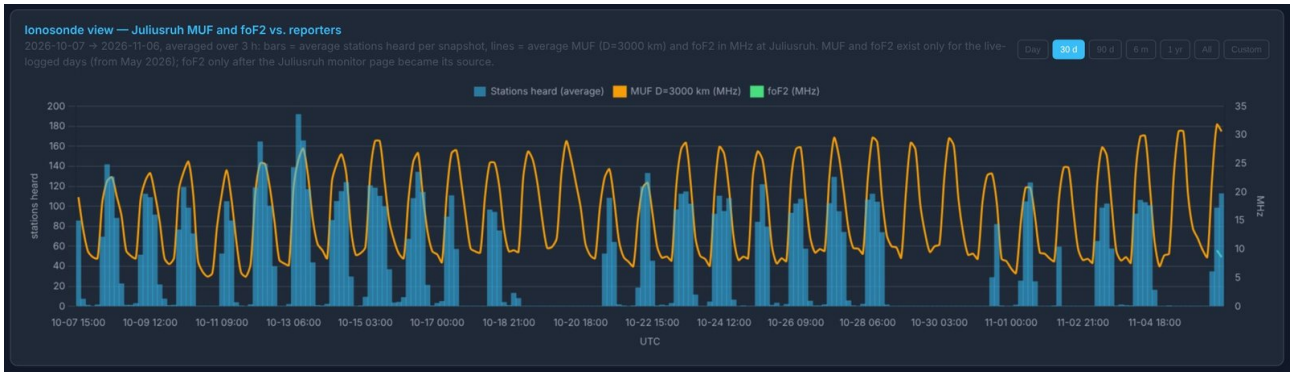


Figure 19. Ionosonde view, 30 d: each bar and point is an average over 3 hours. The daily MUF cycle and the stations heard rise and fall together; days with short or missing bars are days when the car was not transmitting or the band stayed poor.

What it shows the stations heard (bars) with two values measured by the ionosonde at Juliusruh (lines). **foF2** is the *critical frequency*: the highest frequency that the F2 layer reflects straight back up. **MUF(3000)** is the highest frequency that it returns over a 3 000 km hop; at an oblique angle the layer reflects about three times higher frequencies than straight up, so the MUF is roughly 3 × foF2.

How to read it for a 14 MHz signal the MUF must be above 14 MHz on the path. In the day view of 6 November the band opens at about 07 UTC as the MUF climbs through 15–20 MHz, and the number of stations follows the MUF over the day. When the MUF stays below about 12 MHz the bars stay short however active the sun is.

Buttons Day shows every snapshot of one day (◄ date ►); 30 d … All and Custom (a first and last day) show averages over 1 hour to 2 days, at most 500 bars, so that long periods stay readable; hover for the number of snapshots behind a bar. Polls that heard nobody count as 0 stations, so the night MUF is shown too.

Watch out MUF and foF2 exist only for the live-logged days from May 2026; foF2 is missing on many of them, because its first source (GIRO) often returned nothing — the Juliusruh monitor page has been the source since November 2026. Juliusruh is about 1 000 km from the car: it describes the ionosphere near the middle of the busiest paths (to Central Europe) well, other directions less well.

7.4 Band-open heatmap

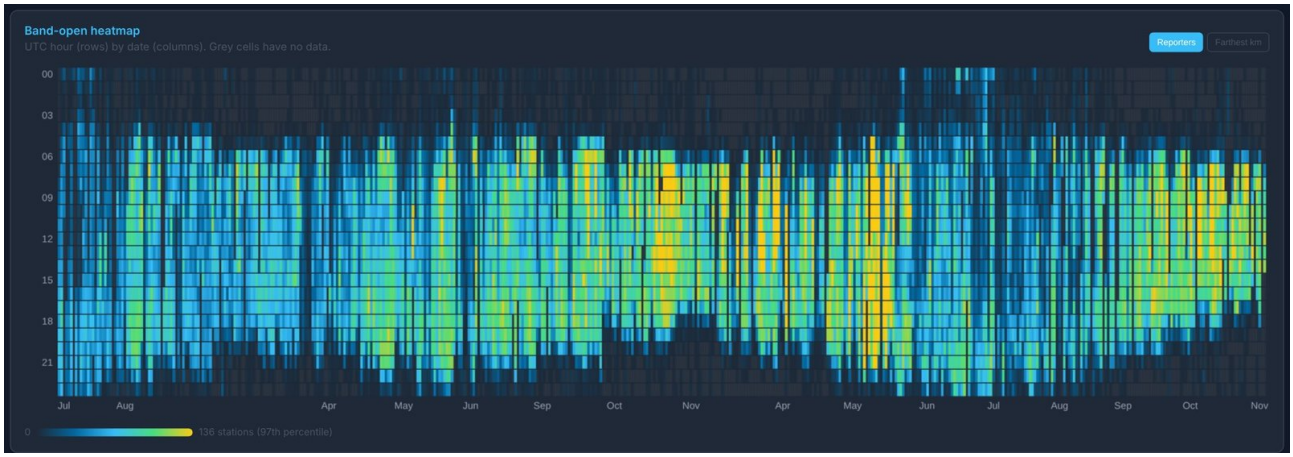


Figure 20. Band-open heatmap for the whole history: one column per day, one row per UTC hour (00 at the top). Yellow = most stations; dark = few; grey = no data.

What it shows the whole period in one picture. Each cell is one UTC hour of one day, coloured by the average stations heard (or, with Farthest km, the farthest station). The colour scale ends at the 97th percentile (given below the chart) so that a few extreme hours do not wash out the rest.

How to read it read it like a weather map of the band. The bright *horizontal band* is the daytime opening; its upper and lower edges are the opening and closing times, and you can see them move with the seasons (a wider band around the equinoxes). *Vertical dark stripes* are single bad days (a geomagnetic storm, the transmitter off). The wide grey blocks are the winters, when the car does not carry the antenna. Hover a cell for its value.

In this station's data three seasons; the autumn months are the brightest, midsummer the dullest (see also *Season against season*).

7.5 DX outlook — next 12 hours

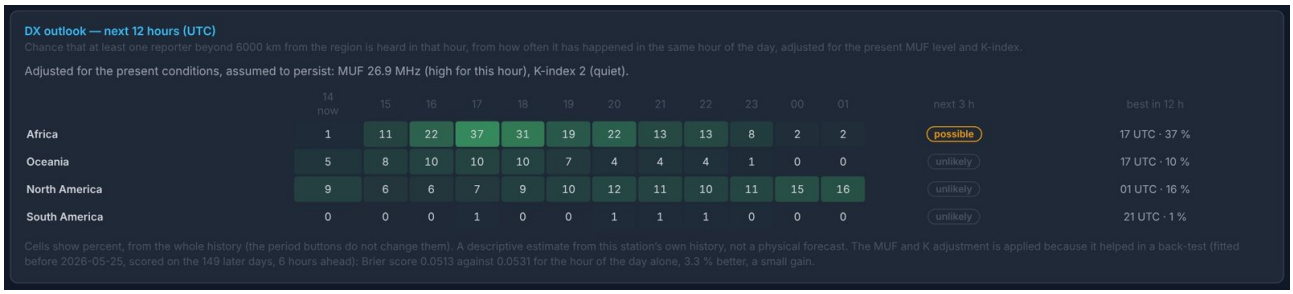


Figure 21. DX outlook at 14 UTC on 6 November 2026: a station beyond 6 000 km in Africa is *possible* in the next 3 hours (22 %), most likely at 17 UTC (37 %).

What it shows for each region that has produced DX reports, the chance (in percent) that at least one station of that region farther than 6 000 km hears the beacon in each of the next 12 UTC hours.

How it is made the starting point is history: on what share of days the region was heard in that hour. This is then adjusted for the present conditions — whether the MUF is low, medium or high for the hour, and whether the K-index is quiet (≤ 2) or active (≥ 3) — assuming they persist. The adjustment is used only if it has proved itself: the model is fitted on the first 70 % of the days and tested on the rest, and the note below the table gives the result (the *Brier score*: the mean squared error of the probabilities, smaller is better). In the figure the adjusted model scored 0.0513 against 0.0531 for the hour of the day alone — 3.3 % better, a small gain, so it is applied.

How to read it darker green = more likely; *likely* means at least 40 % in the next three hours, *possible* 15–40 %, *unlikely* below. Hover a cell for the plain hour-of-day value and the adjustment factors. It always uses the whole history.

Watch out it is a description of this station's history, not a physical forecast: a sudden storm or a flare is not foreseen.

7.6 Typical day

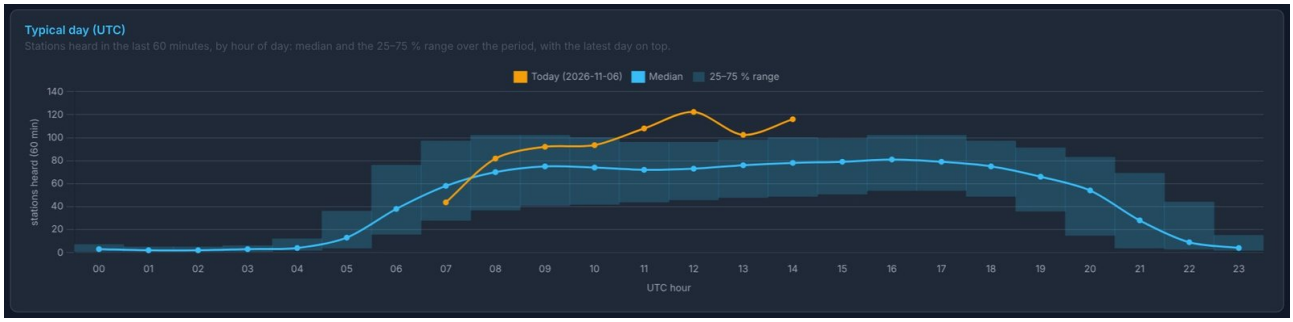


Figure 22. Typical day: median stations heard per UTC hour (line) with the middle half of the snapshots (shaded), and today in orange.

What it shows for each UTC hour, the median stations heard over the period and the 25–75 % range (half of all snapshots of that hour lie inside the shaded bar); the orange line is today (empty until the first station of the day is heard, or while the transmitter is off).

How to read it the curve is the rhythm of the band. In this station's data it is near 3 between 00 and 04 UTC (closed), rises steeply between 05 and 08, stays at 70–80 from 08 to 18 and falls through 19–22 UTC. If the orange line runs above the shaded range, today is a good day; below it, a poor one. A narrow shaded bar means the hour is predictable; a tall one, that it varies a lot from day to day.

7.7 Reporters vs. MUF, K-index and solar flux



Figure 23. Reporters vs. Juliusruh MUF: index (bars, 100 = usual for the hour) and DX share (green) for each 2 MHz step of MUF.



Figure 24. Left: by K-index. Right: by solar flux (SFI) in steps of 10.

What they show the snapshots are grouped by the space-weather value of their moment (MUF in 2 MHz steps, K in whole numbers, SFI in steps of 10); for each group the bar is the **index** (100 = as many stations as usual at those hours) and the green line the **DX share**. Groups with fewer than 15 snapshots are left out; hover a bar for the count.

MUF the clearest relation on the page. With a MUF below about 16 MHz the index is only 20–45: the band is barely open even at hours that are normally good. Between 18 and 20 MHz it reaches 100, and from 20 to 28 MHz it is 140–155, with a DX share around 20 %. Above 28 MHz the groups are small and the bars jump about.

K-index a disturbed geomagnetic field weakens the F2 layer at high latitudes, which is where this station is. The index falls from 122 at K 0 to about 90 at K 3–4 and collapses at K 6 (41) and K 7 (8); the DX share falls from 22 % to almost nothing. A single high bar (here K 5, 111) can come from a handful of days and should not be over-read.

Solar flux SFI describes the sun, not the ionosphere over the path, and changes slowly; on its own it explains little here. A higher SFI tends to raise the MUF over weeks, but within one season the MUF of the day matters far more.

Watch out these three charts use only the live-logged days of 2026; the rebuilt seasons have no space-weather values.

7.8 Geomagnetic storm days

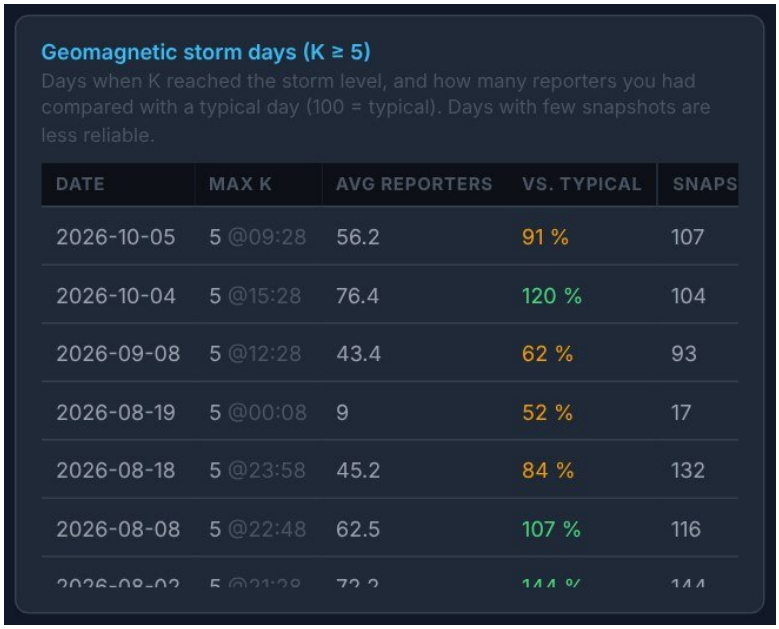


Figure 25. Days when K reached 5 or more.

What it shows every day of the period on which the K-index reached 5 (a minor storm) or more: the highest K and when it occurred, the average stations heard, the day's **index** against the typical day, and the snapshots behind it. ▶ opens the

moment of the K maximum in the History Player.

How to read it not every storm hurts: on 4 October 2026 the index was 120 although K reached 5, on 8 September only 62. Timing matters — a storm that peaks at night or after the band has closed does less — and so does its strength. Days with few snapshots (the car not used all day) are less reliable.

7.9 DX windows by hour and month by month



Figure 26. Left: share of snapshots with a station beyond 6 000 km by UTC hour (bars) and the average farthest station (line). Right: month by month, average stations heard (bars) and DX share (line).

DX windows by hour when the long-distance paths are open. This station has two windows: 03–07 UTC (up to 28 %: mostly North America, whose evening reaches the Finnish morning) and 09–12 UTC (26 %), with a minimum around 14 UTC (7 %) and a smaller evening rise (15 % at 17–18 UTC: Africa and Oceania). The line shows how far, on average, the farthest station of the hour is.

Month by month the seasons at a glance; hover for the days, snapshots and the average solar flux of the month. Compare the bars only between months with enough days — a month with a few days of use is shown with the same width.

7.10 Grey line and long-distance windows

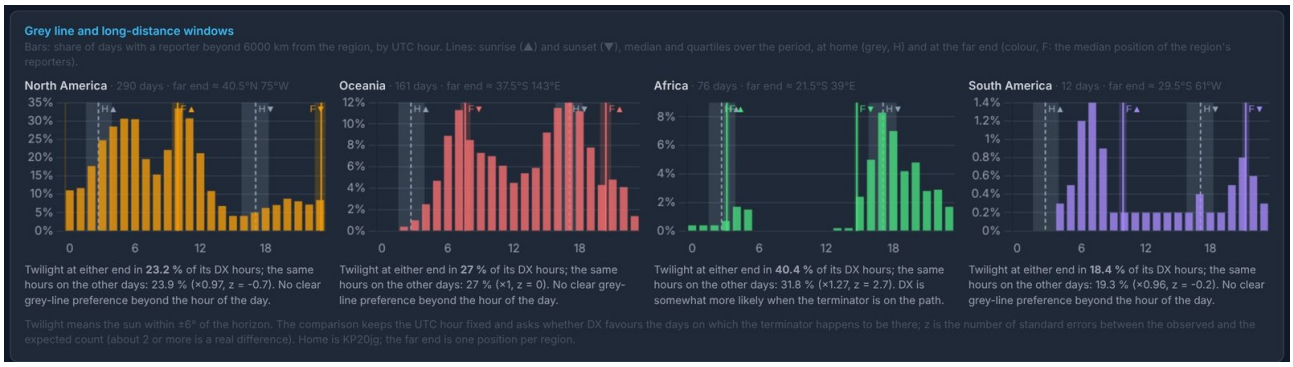


Figure 27. The grey-line card: one chart per region (North America, Oceania, Africa, South America) with the sunrise (▲) and sunset (▼) times at home (grey, H) and at the far end (colour, F).

What it shows for each region: the share of days with a DX report from that region in each UTC hour (bars), with the times of sunrise and sunset at the home square and at the far end (the median position of the region's stations) as vertical lines, their spread over the period shaded.

The test long paths on 20 m are known to favour the *grey line*, the twilight zone where one end of the path is at sunrise or sunset. The card counts in how many of the region's DX hours the sun was within ±6° of the horizon at either end, and

compares this with the same UTC hours on the other days of the period (so the time of day is held fixed). *Ratio* > 1 means DX was more frequent when the terminator was on the path; *z* says how sure: about 2 or more is a real difference.

In this station's data Africa: twilight in 40 % of its DX hours against 32 % expected (ratio 1.27, z = 2.7) — DX is somewhat more likely with the terminator on the path. North America and Oceania: ratio about 1.0 — their windows are explained by the hour of the day alone.

7.11 Where you are heard and the distance distribution

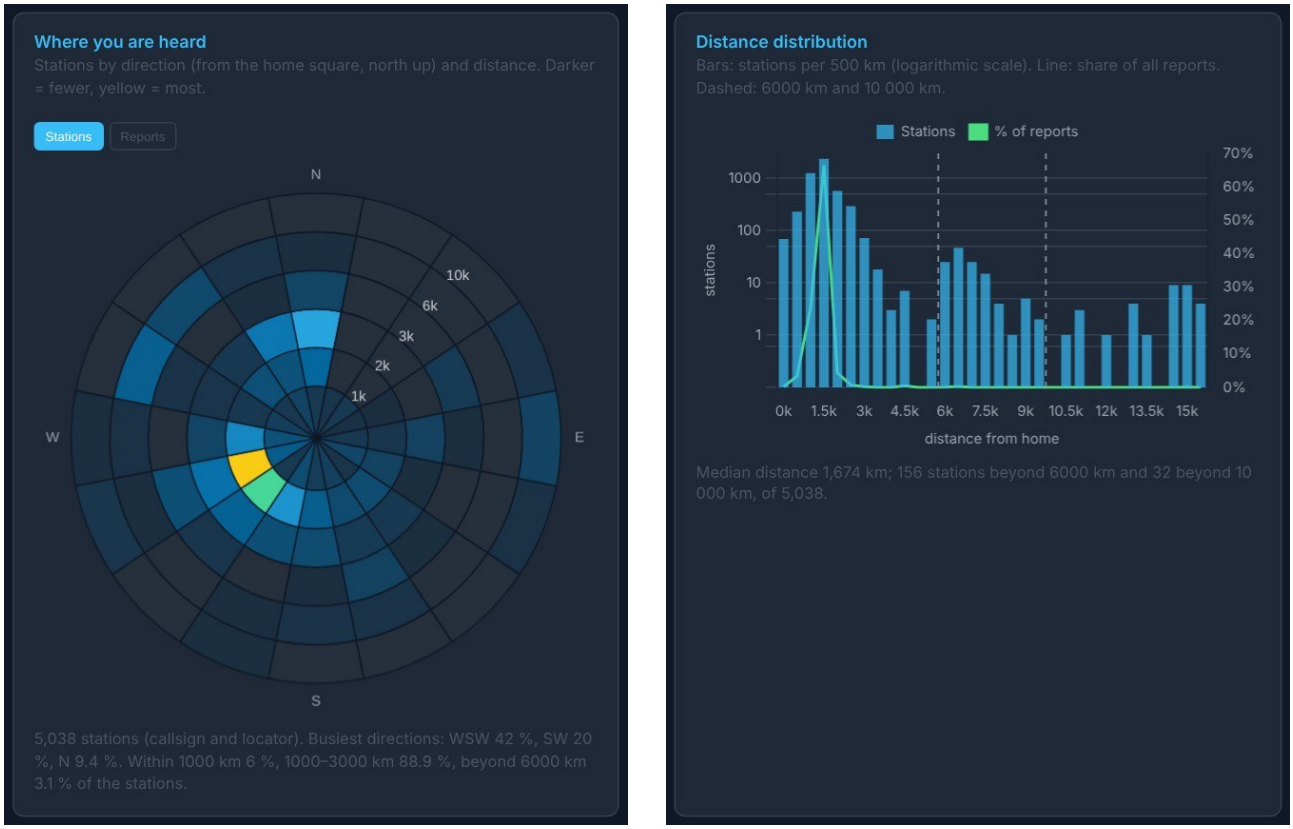


Figure 28. Left: the stations by direction and distance from the home square. Right: the stations per 500 km (logarithmic) and the share of reports.

Where you are heard a compass rose seen from the home square, north up. Each ring is a distance band (to 1 000, 2 000, 3 000, 6 000, 10 000 km and beyond), each slice a direction of 22.5°. The colour of a cell is the number of stations there (or, with Reports, how many reports they produced); a square-root scale keeps the quieter cells visible. Hover a cell for its numbers. The direction is the starting direction of the great-circle path from home — the direction a beam antenna would point.

How to read it the bright cells are where the signal lands most often. Here 72 % of the stations are 1 000–2 000 km away and 42 % lie to the west-south-west (the Netherlands, Belgium, the UK; most of Germany is in the next slice, south-west): the first hop of a 20 m signal from southern Finland comes down in Western and Central Europe. The near ring is thin because the first hop skips over the nearest 1 000 km (the *skip zone*). The outer rings show the long paths: North America to the north-west, Australia to the east.

Distance distribution the same stations as a histogram. The vertical axis is logarithmic (1, 10, 100, 1000), because otherwise the few distant stations would be invisible next to the thousands in Europe; the green line is the share of all reports in each step (90 % of the reports come from 1 000–2 000 km). The dashed lines mark 6 000 and 10 000 km. Here the median station is 1 674 km away; 156 stations are beyond 6 000 km and 32 beyond 10 000 km.

7.12 Band opening and closing

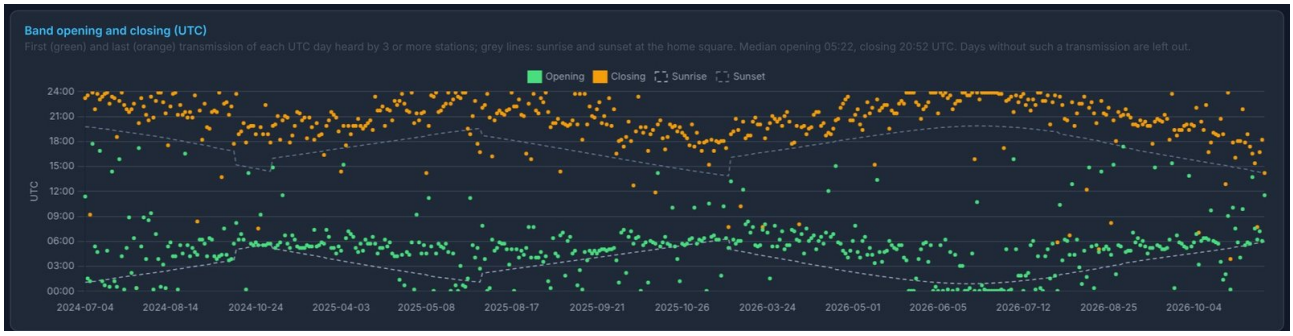


Figure 29. The first (green) and last (orange) transmission of each UTC day heard by 3 or more stations, with sunrise and sunset at home (grey dashed lines).

What it shows for each day, the time of the first and of the last transmission that at least 3 stations heard — when the band opened and closed for this signal — next to sunrise and sunset at the home square.

How to read it the green dots follow sunrise and the orange dots follow sunset, both later. The band opens once the sun has built up the F2 layer: about half an hour after sunrise in October and November, two to three hours after it in April and May. It closes about three and a half hours after sunset in every month, while the layer slowly decays. In June and July the band often stays open all night (closing near midnight, opening again right after it) — the sun at 60° N barely sets. Over the whole history the median opening is 05:22 and the median closing 20:52 UTC. Single dots far from the rest are days with a late start or an early stop of the transmitter, or a day with only a short opening.

7.13 Season against season and stations per month



Figure 30. Left: median daytime stations per snapshot, by month and year. Right: stations per month and how many were new.

Season against season the same calendar months of each year side by side: the median stations heard per snapshot in the daytime (08–17 UTC), or with DX > 6000 km the share of snapshots with a DX station. A month is left empty when it has fewer than 50 daytime snapshots; hover for the days of data. Here October gives 61, 103 and 110 stations in 2024, 2025 and 2026, and the summers dip (in summer the daytime F2 layer at high latitudes is weaker than in spring and autumn). Differences between the years mix the sun's cycle, the number of active receivers and how much the car was used.

Stations per month blue: the different stations that heard the beacon in the month; green: those never heard before. The first month is all new; afterwards the green bars show how many newcomers each month brings (for example 172 of 765 in October 2026).

7.14 Signal strength by hour and by distance

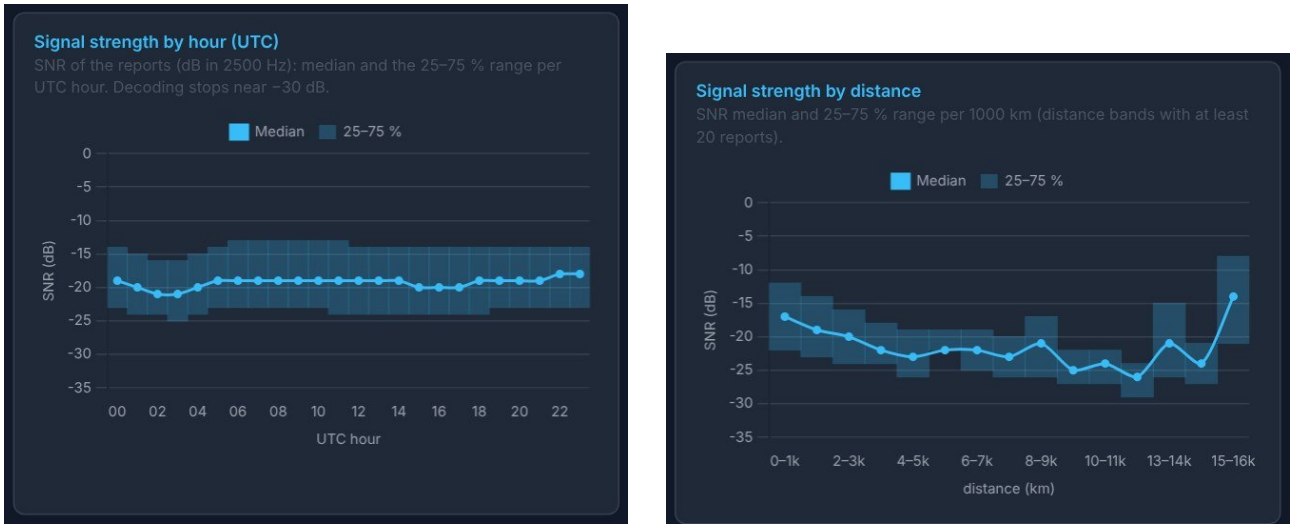


Figure 31. SNR of the reports: median (line) and middle half (shaded), by UTC hour (left) and by 1 000 km of distance (right).

What it shows the SNR (dB in 2 500 Hz) that the stations reported: the median and the middle half of all reports, per UTC hour and per 1 000 km. Decoding stops near −30 dB, so the lower edge is a floor.

How to read it by hour, the median stays near −19 dB all day: when the band is open, the typical station hears the beacon about 10 dB above the decoding limit. By distance, the SNR falls from −17 dB at 0–1 000 km to about −24 dB beyond 9 000 km — the long paths are heard, but near the limit. Single bands can break the pattern (the last one here, −14 dB at 15 000 km, is a few strong Australian stations).

Watch out only stations that *decoded* the signal report an SNR. A poor hour therefore shows fewer reports, not lower SNRs; for how many stations hear you, use the other cards.

7.15 Unusual days


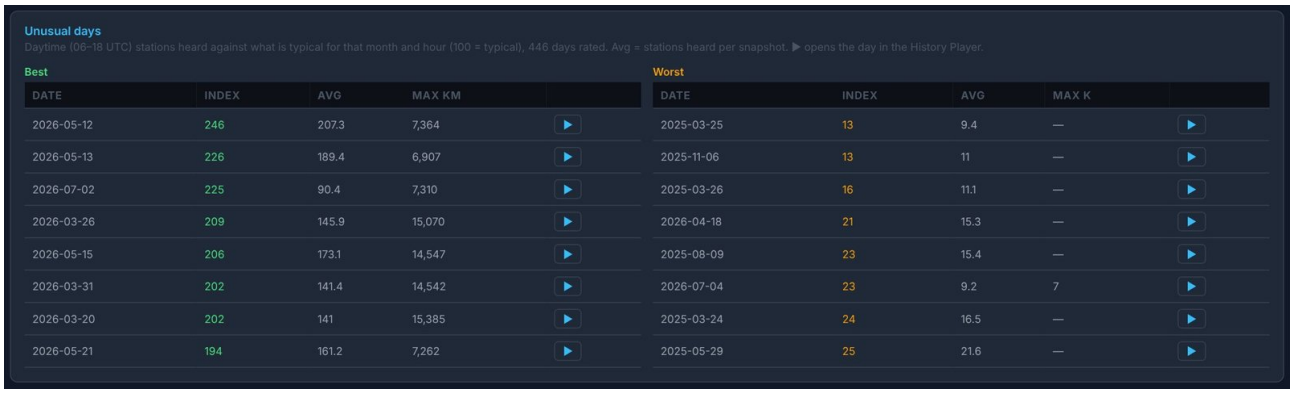


Figure 32. The eight best and worst days of the period.

What it shows the days whose daytime (06–18 UTC) differed most from what is typical for *that month of the year* and those hours — so a good October day is compared with other October days, not with midsummer. The **index** is 100 for a typical day; *Avg* is the average stations heard per snapshot; the best days also give the farthest station, the worst days the highest K-index. Days with fewer than 36 daytime snapshots are not rated. ▶ opens the day in the History Player (the best moment for a best day).

How to read it the best days are the openings worth replaying: 12 May 2026 had index 246, with up to 344 stations in one snapshot. The worst days point to storms (look at Max K) or to problems: a day with a quiet K and very few stations is often a transmitter or antenna problem.

7.16 Unusual DX openings

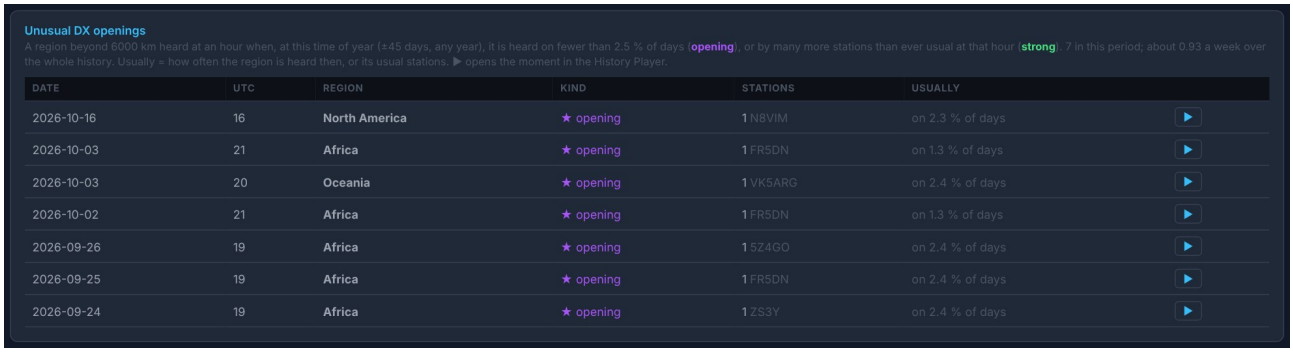

Unusual DX openings

A region beyond 6000 km heard at an hour when, at this time of year (±45 days, any year), it is heard on fewer than 2.5 % of days (opening), or by many more stations than ever usual at that hour (strong). 7 in this period; about 0.93 a week over the whole history. Usually = how often the region is heard then, or its usual stations. ▶ opens the moment in the History Player.

DATE	UTC	REGION	KIND	STATIONS	USUALLY	
2026-10-16	16	North America	★ opening	1 N8VIM	on 2.3 % of days	▶
2026-10-03	21	Africa	★ opening	1 FR5DN	on 1.3 % of days	▶
2026-10-03	20	Oceania	★ opening	1 VK5ARG	on 2.4 % of days	▶
2026-10-02	21	Africa	★ opening	1 FR5DN	on 1.3 % of days	▶
2026-09-26	19	Africa	★ opening	1 5Z4GO	on 2.4 % of days	▶
2026-09-25	19	Africa	★ opening	1 FR5DN	on 2.4 % of days	▶
2026-09-24	19	Africa	★ opening	1 ZS3Y	on 2.4 % of days	▶

Figure 33. Unusual DX openings in the 90 days before 3 October 2026 (the test data reach to 6 November).


What it shows every hour of the period in which a region beyond 6 000 km (North America, South America, Africa, Asia, Oceania) behaved unusually, newest first, consecutive hours of one region joined. **Opening** (purple): the region was heard at an hour when, *at that time of year* (the days within ±45 days of the date in any year, the day itself left out), it is heard on fewer than 2.5 % of days — with at least two stations, or one station in two hours running, so a single decode does not count. **Strong** (green): the region is usual at that hour, but more stations heard the car than on any usual day (above the 99 % level of the days it was heard, at least 4 stations and twice the median). Stations are counted by callsign without suffixes, so K1RA-4 and K1RA-PI are one.

How to read it *Usually* says how often the region is heard at that hour at that time of year, or how many of its stations usually hear the car then. ▶ opens the moment in the History Player, so you can watch the opening come and go. The same check runs live: an event now appears on the Propagation card (Section 3).

In this station's data 66 events in the whole history, about one a week (0.93): 25 strong North-American hours (spread over the night and morning), and openings to Africa (14, in the early morning and the evening — Réunion, South Africa), Oceania (10, and 2 strong), South America (10) and North America (5, in the afternoon, 15–17 UTC). Most fall in the spring and late-summer months (April, August, September).

Watch out the rarer a region is in your history, the more easily it counts as unusual; the hours the transmitter was off are not counted as chances (Section 7).

7.17 Most loyal reporters

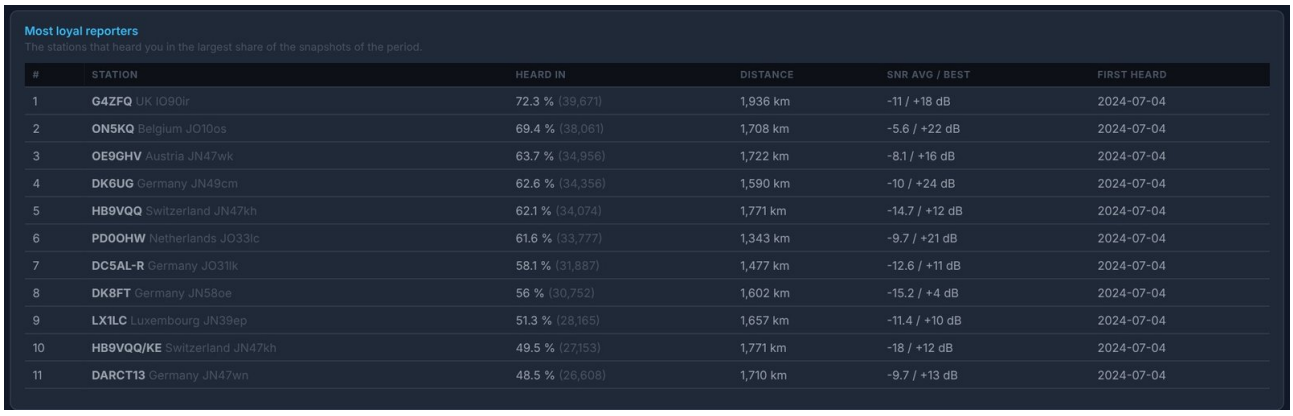

Most loyal reporters

The stations that heard you in the largest share of the snapshots of the period.

#	STATION	HEARD IN	DISTANCE	SNR AVG / BEST	FIRST HEARD
1	G4ZFQ UK IO90ir	72.3 % (39,671)	1,936 km	-11 / +18 dB	2024-07-04
2	ON5KQ Belgium JO10os	69.4 % (38,061)	1,708 km	-5.6 / +22 dB	2024-07-04
3	OE9GHV Austria JN47wk	63.7 % (34,956)	1,722 km	-8.1 / +16 dB	2024-07-04
4	DK6UG Germany JN49cm	62.6 % (34,356)	1,590 km	-10 / +24 dB	2024-07-04
5	HB9VQQ Switzerland JN47kh	62.1 % (34,074)	1,771 km	-14.7 / +12 dB	2024-07-04
6	PD0OHW Netherlands JO33lc	61.6 % (33,777)	1,343 km	-9.7 / +21 dB	2024-07-04
7	DC5AL-R Germany JO31lk	58.1 % (31,887)	1,477 km	-12.6 / +11 dB	2024-07-04
8	DK8FT Germany JN58oe	56 % (30,752)	1,602 km	-15.2 / +4 dB	2024-07-04
9	LX1LC Luxembourg JN39ep	51.3 % (28,165)	1,657 km	-11.4 / +10 dB	2024-07-04
10	HB9VQQ/KE Switzerland JN47kh	49.5 % (27,153)	1,771 km	-18 / +12 dB	2024-07-04
11	DARCT13 Germany JN47wn	48.5 % (26,608)	1,710 km	-9.7 / +13 dB	2024-07-04

Figure 34. The stations heard in the largest share of snapshots.

The stations that hear the beacon most faithfully: the share of the period's snapshots they appear in, their distance, average and best SNR, and the day they were first heard in the period. Here G4ZFQ (England) appears in 72 % of all snapshots and ON5KQ (Belgium) in 69 %: these receivers listen around the clock and are about 1 700–1 900 km away, in the busiest ring of the compass rose. Several entries with the same callsign and a suffix (/RE, /KE . . .) are usually separate receivers of one operator.

7.18 Farthest reporters and excluded reports

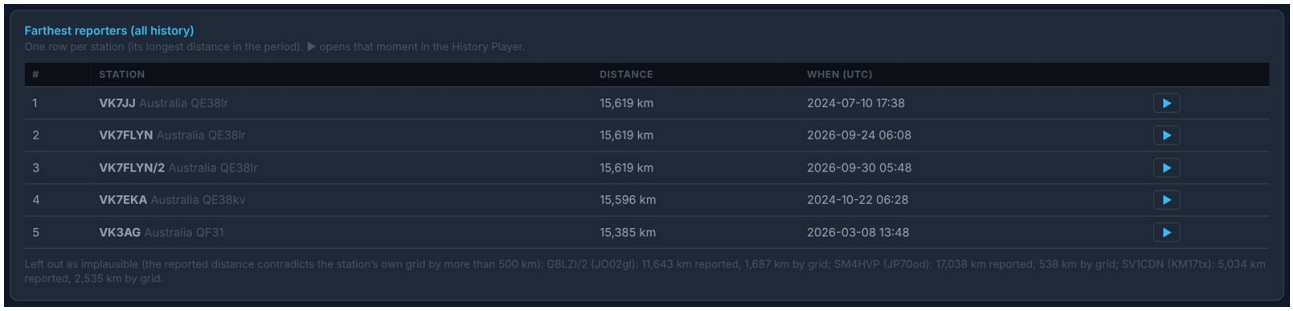


Figure 35. The farthest stations of the period, one row per station, and the reports left out as implausible.

The ten farthest stations of the period, one row per station with its longest distance; ▶ opens that moment in the History Player. Below the table, **Excluded reports** lists the stations whose reported distance contradicts their own locator by more than 500 km (for example SM4HVP: 17 038 km reported, 538 km by its locator) — a mistyped or stale locator. They are left out of every chart and record of the Analysis page. A reported distance of 0 means “unknown” and is not counted as a contradiction.

8 The WPRS page — where the car has been



Figure 36. The WPRS page with the trip of 14–18 October 2026: the days on the left, the visited squares (darker = more fixes), the track with a dot per fix, start (green), end (red), home (red ring) and the drive replay bar.

WPRS (Whisper Position Reporting System) is the name of the idea of using WSPR as a position beacon. Each transmission carries the six-character locator that the transmitter computed from its GPS fix, so the heard transmissions form a track of the car with no mobile network or VHF coverage needed. The resolution is one Maidenhead subsquare, about 4.6×4.6 km here, and a fix exists only for a transmission that some station heard (at night, when the band is closed, there are gaps).

The day list. One row per UTC day: squares and fixes, *moved* (the largest distance between two squares used that day), the path length (summed distance between consecutive fixes) and, in amber, how far from home the car got. The *home square* is the most frequent locator. The filter shows only days with at least the chosen movement or distance (any change of square, 5, 10, 25, 100, 150 or 200 km; 10 km is the default, because an ordinary trip between two neighbouring squares is 4.6–6.5 km), and the span shows 1, 2, 3 or 5 days from the chosen one.

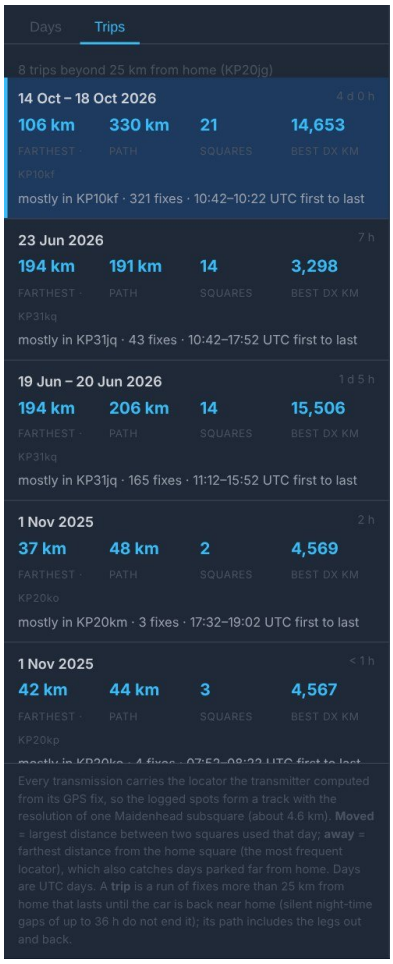


Figure 37. The trips of the whole history.

Trips. The Trips tab groups consecutive fixes more than 25 km from home into trips; night-time silences of up to 36 hours do not end a trip. Each card gives the dates and duration, the farthest point and its square, the path, the number of squares, the best DX heard during the trip, the square used most and the first and last fix. Click a card to draw and replay the trip.

The map and the drive replay. The squares visited are shaded by their number of fixes; the dashed line joins the fixes; hover a dot for its time, locator, stations and best DX. The DRIVE bar plays the fixes in order (1–16 per second) and draws the trail so far in amber; the slider scrubs, |◄ goes back to the start, and History Player opens the shown moment on the live map, with the stations that heard the car there.

Copy link gives an address that opens the same day, span and fix.

The track is public. Anyone can follow the car's position to within about five kilometres on the public WSPR databases while the transmitter is on.

9 What you can find out

Question	Where to look	What to expect
Is the band open now, and how well?	Propagation card; Analysis *Right now*	a level from Very low to Exceptional, and below it *Typical for this hour* or better against the hour and MUF
Is the transmitter working?	status dot, *last fix* label, Propagation	a fix every 10 minutes in the daytime; *No reports for 20 min — transmitter off?* and *No propagation or TX Fail* are warnings
Which stations hear me, and how strongly?	Reporter List, histogram, Reporter Plot	most at −27 to −12 dB, 1 000–2 000 km to the south-west
Will a long-distance path open soon?	DX outlook; DX windows by hour	per region the chance in the next 12 hours; windows at 03–07 and 09–12 UTC
Why was today poor?	Ionosonde view, Solar Conditions, Storm days, Unusual days	a low MUF, a high K, or nothing — then check the transmitter
When does the band open and close?	Band opening and closing; Typical day	0.5–3 h after sunrise; about 3.5 h after sunset
How is this season compared with the last?	Season against season; Month by month	the same months side by side
Does the grey line help?	Grey line card; History Player with Day / Night	a ratio above 1 with $z \geq 2$
What was the best day, and what happened?	Unusual days ▶, Farthest reporters ▶	opens the moment in the History Player
Where was the car on a day?	WPRS, History	track, squares and trips

Table 1. Questions and where to look.

10 Limitations

- **One station.** Everything describes one car, one antenna and 200 mW, mostly from southern Finland. Another station, power or antenna would see a different band.
- **Only what was heard and uploaded.** A transmission that nobody decoded leaves no trace; the logger cannot tell a closed band from a switched-off transmitter or a missing antenna. Late uploads are caught for 45 minutes.
- **The receivers change.** The number of active receivers, especially in Europe, changes over the years and with the hours of the day; part of any difference between seasons comes from them, not from the band.
- **Rebuilt seasons.** 2024 and 2025 were rebuilt from `wspr.live`; a check on a live-logged week found the same numbers (41.0 stations per snapshot both ways), but they have no space-weather values.
- **One ionosonde.** The MUF and foF2 of Juliusruh describe the ionosphere about 1 000 km away, not on every path.
- **Space weather is a feed.** The solar indices come from hamqsl.com and are only as fresh as their source; a K value is a three-hour value.
- **Associations, not causes.** The charts show what happened together. The index method removes the daily rhythm but not, for example, the season.
- **Small samples.** Groups with few snapshots are noisy; hover for the count. The Analysis page leaves out groups with fewer than 15 snapshots and days with fewer than 36 daytime snapshots.
- **Implausible reports.** The Analysis page leaves out stations whose distance contradicts their locator (*Excluded reports*). Everywhere else, a transmission whose farthest station was such a report shows its best distance as unknown (—), and it counts neither for the day's best nor for the all-time record. Until 7 November 2026 the all-time Best DX showed 17 038 km from SM4HVP, whose locator is only 538 km away; the record is now 15 619 km.
- **Position.** The WPRS track has the resolution of a subsquare (about 5 km) and gaps when nobody hears the car.

11 Quick reference

Item	Meaning
Spot, transmission	a 2-minute WSPR transmission that was heard: time, locator, stations, farthest station
Snapshot	the stations heard in the 60 minutes before a poll (every 10 minutes, at :08, :18 …)
Stations heard	the number of stations in a snapshot
DX	a station farther than 6 000 km; *DX share*: share of snapshots with one
Index	stations heard compared with what is typical for the same UTC hour; 100 = typical
Usual range	the middle half (25–75 %) of the snapshots of the same hour
MUF(3000)	highest frequency returned over a 3 000 km hop (Juliusruh); 20 m needs more than 14 MHz
foF2	the critical frequency of the F2 layer (straight up); MUF $\approx 3 \times$ foF2
K-index	geomagnetic disturbance 0–9; storm from 5
SFI	10.7 cm solar flux, the sun's activity
SNR	signal-to-noise ratio in dB in 2 500 Hz; decoding limit about -30 dB
Locator	Maidenhead: KP (field) 20 (square) jg (subsquare, about 4.6 km)
Status dot	green $<$ 20 min, amber $<$ 2 h, red older
Fix age label	green $\leq$ 25 min, amber $\leq$ 60 min, red older
Grey line	the twilight zone; tested with the sun within $\pm 6°$ of the horizon
Brier score	mean squared error of a probability forecast; smaller is better
Links	`#history=DATE`, `#stats=DATE`, `#analysis`, `#wprs=DATE&days=N&fix=N`

Table 2. Terms and colours.

More to read. The Guides tab also holds two papers written from this station's data: *Twenty-metre WSPR propagation study* (three seasons in detail, with the methods behind the Analysis page) and *WPRS — Whisper Position Reporting System* (position beaconing with WSPR), with its two-page summary. The program and its documentation are at `https://github.com/oh2gax/wspr_logger`.

Version history. 1.0, 7 November 2026: first version. 1.1, 7 November 2026: the Analysis periods 7 d and 14 d and the opening at 14 days; implausible reports left out of the records too; country names from the locator; the History Player card in the menu and the replayed moment in the Current Position box; new screenshots of the live map, the History Player, Statistics and the info window. 1.2, 9 November 2026: the Typical Day graph on the live map, foF2 in the MUF graph, the Reporter List sorted both ways, a shorter Locator block in the menu, the age label at the car shortened to *N min ago*, the Reporter List and Reporter Countries resizable and scrolling; the Propagation card compared with usual, the transmitter warning by the usual hours, transmitter-off time left out of the Analysis; unusual DX openings live and on the Analysis page.